

Descriptions

This is working voltage 3.3V ESD diode in a DFN1006-2L package.


Features

- 2-pin lead-less package
- Junction capacitance (Max value: 0.8pF)
- Peak Pulse Current (8/20 μ s) Max: 5A
- IEC61000-4-2 (ESD) $\pm$ 20kV (air), $\pm$ 15kV (contact)
- Low clamping voltage
- Low leakage current
- Working voltages:3.3V
- RoHS Compliant

Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation,Digital Cameras
- Peripherals, Audio Players, Industrial Equipment

Equivalent Circuit & Pinning



DFN1006-2L

Absolute Maximum Ratings(Ta=25°C)

Parameters	Symbol	Value	Unit
Peak Pulse Power (tp=8/20μs waveform)	P _{PP}	90	W
Peak Pulse Current (8/20μs)	I _{PP}	5	A
Forward Voltage(IF=10mA)	V _F	1.2	V
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V _{ESD}	±20 ±15	KV
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C

Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V _{RWM}				3.3	V
Reverse Breakdown Voltage	V _{(BR)R}	I _R = 1mA	5			V
Reverse Leakage Current	I _R	V _R = 3.3V			0.2	uA
Clamping voltage	V _C	I _{PP} = 1A, T _p =8/20us			11	V
Clamping voltage	V _C	I _{PP} = 5A, T _p =8/20us			18	V
Junction capacitance	C _T	V _R = 0V, f = 1MHz			0.8	pF

Electrical Characteristic Curve

FIG1: Power rating derating curve

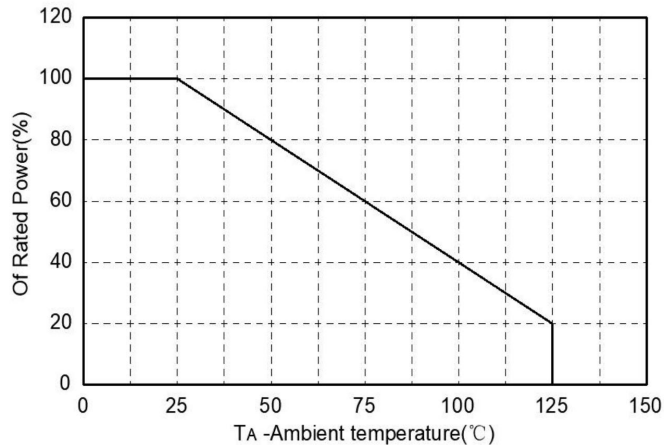


FIG2: pulse Waveform

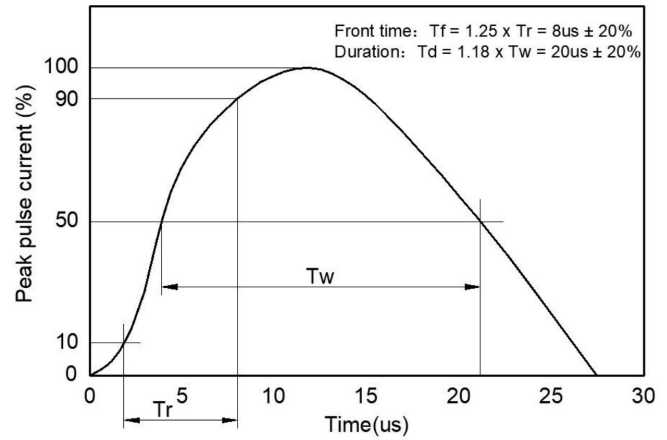


FIG3: Capacitance between terminals characteristics



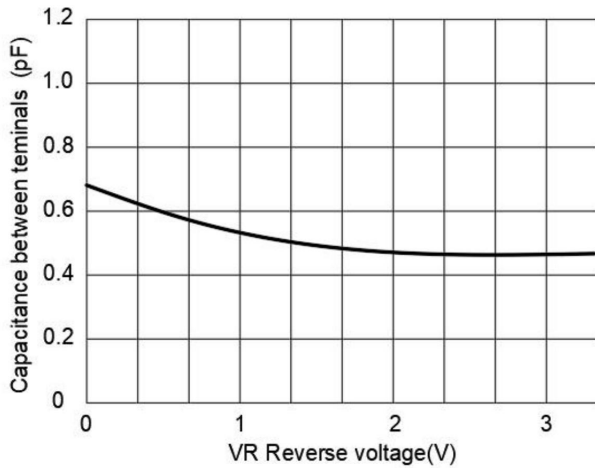


FIG4: Clamping Voltage vs. Peak Pulse Current

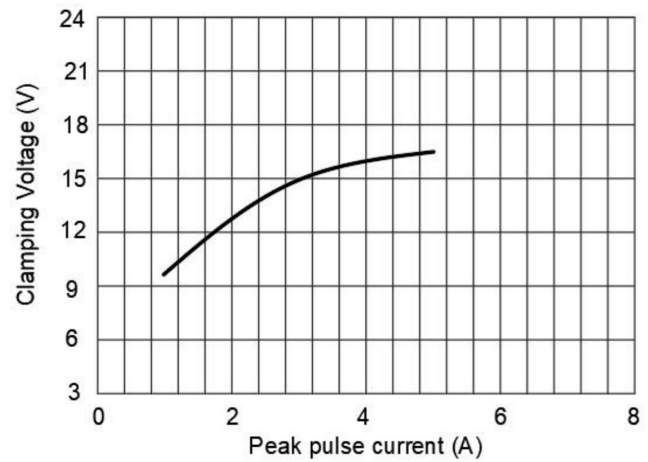


Marking Instructions

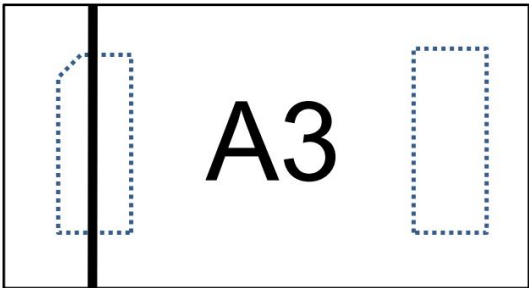

A3 = Marking Code


Package Outline Dimensions

DFN1006-2L

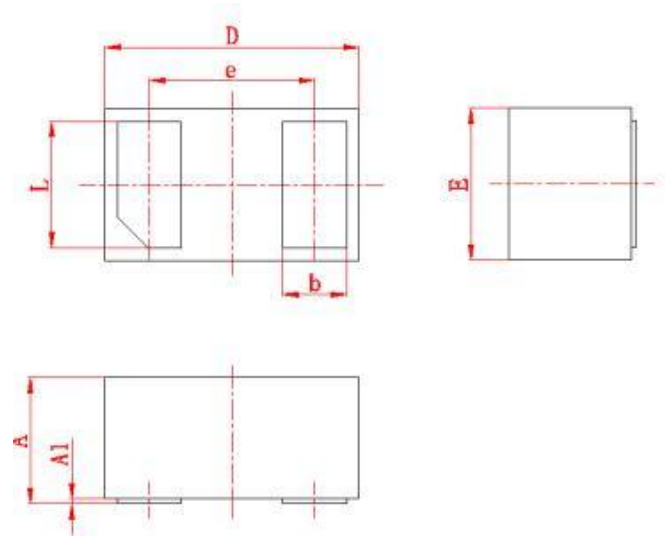

Symbol	Dimension in Millimeters	
	min	max
A	0.4	0.5
A1	0	0.05
D	0.9	1.1
E	0.55	0.65
e	(0.65)	
b	0.2	0.3
L	0.34	0.55

Tape & reel specification - DFN1006

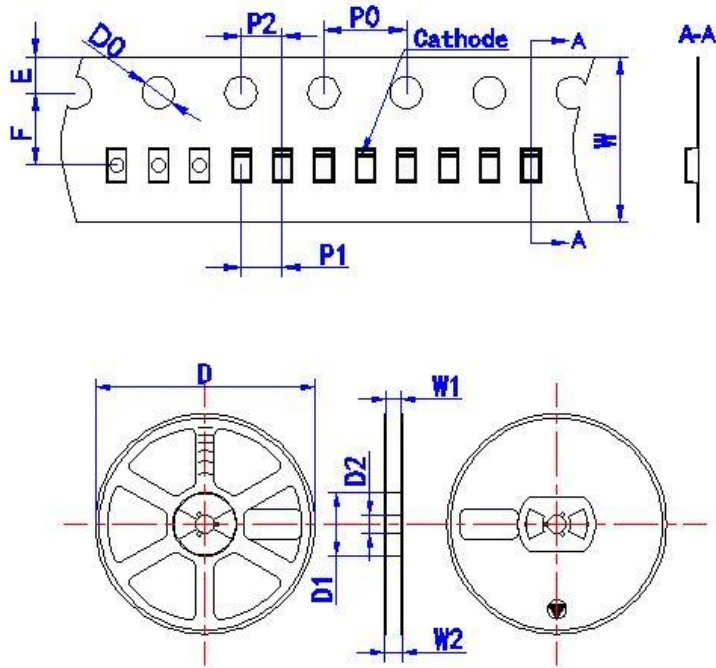

Symbol	Dimension in Millimeters
Tape	
D0	1.50+0.10/-0.00
E	1.75±0.10
F	3.50±0.10
P0	4.00±0.10
P1	2.00±0.10
P2	2.00±0.10
W	8.00+0.3/-0.1
Reel	
D	178.0±2.00
D1	54.40±1.00
D2	13.00±1.00
W1	9.50±1.00
W2	12.30±1.00